

**CITY OF HEMET
PUBLIC WORKS DEPARTMENT**

STANDARD DRAWINGS


CITY OF HEMET PUBLIC WORKS DEPARTMENT

STANDARD DRAWINGS


TABLE OF CONTENTS (Cont.)

STANDARD No.	MISCELLANEOUS
G-800	TYPICAL CUL-DE-SAC
G-801	TEMPORARY TURNAROUND AT DEAD-END STREETS
G-802	TYPICAL BARRICADE
G-802A	GUIDE MARKER
G-803	NO TRESPASSING/NO -804
<i>G-804</i>	<i>[NOT USED]</i>
G-805	POWER POLE AND STREET LIGHT STANDARDS
G-805A	LOCATION OF UNDERGROUND UTILITIES
G-806	STANDARD KNUCKLE
G-807	STANDARD CITY TITLE BLOCK
G-808	STANDARD CITY STREET LIGHTS
G-808A	STREET LIGHTS SERVICE PEDESTAL AND PULLBOX
G-808B	FUSE HOLDERS DETAILS
G-809	ADVANCED STREET NAME SIGN
G-810	STREET NAME SIGN
G-810A	STOP SIGN
G-810B	SIGN AND STRIPING PLAN
G-810C	SIGN LOCATION
G-811	STREET NAME FOR TRAFFIC SIGNAL
G-812	STREET TREE PLANTING DETAIL
G-813	STREET TREE LOCATION

Text in ***BOLD ITALICS*** indicates 2011 revisions.

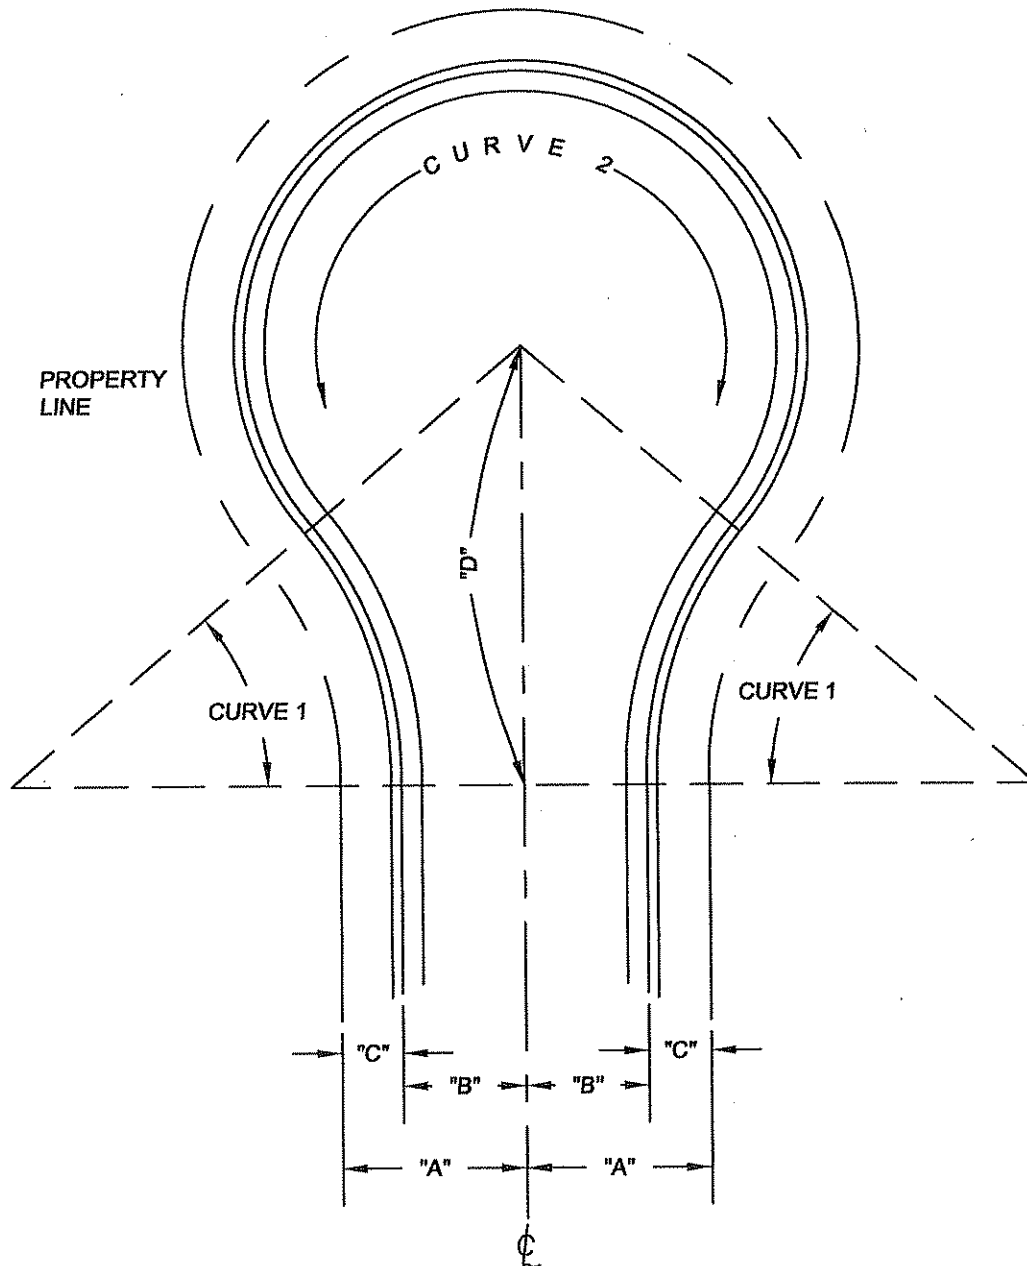

					CURVE 1						CURVE 2					
						CURB			PROPERTY				CURB		PROPERTY	
R/W	A	B	C	D		R	L	T	R	L	T		R	L	R	L
56'	28'	18'	10'	64.99'	40°32'09"	58'	41.03'	21.42'	48'	33.96'	--	261°04'18"	42'	191.38'	52'	236.94'





City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
 510 E. FLORIDA AVENUE
 HEMET, CA 92543
 (951) 785-2360

TYPICAL CUL-DE-SAC

[Signature]
 JORGE L. BIAGIONI, PRINCIPAL ENGINEER R.C.E. 33751
 MAR 2011
 DATE
 REVISIONS
 N:\PW\4100\COH_STDS\REVISIONS\MISC-G\G-800.dwg
 N.Belltran 2011

1
 OF 1 SHEETS
STANDARD NO.
G-800

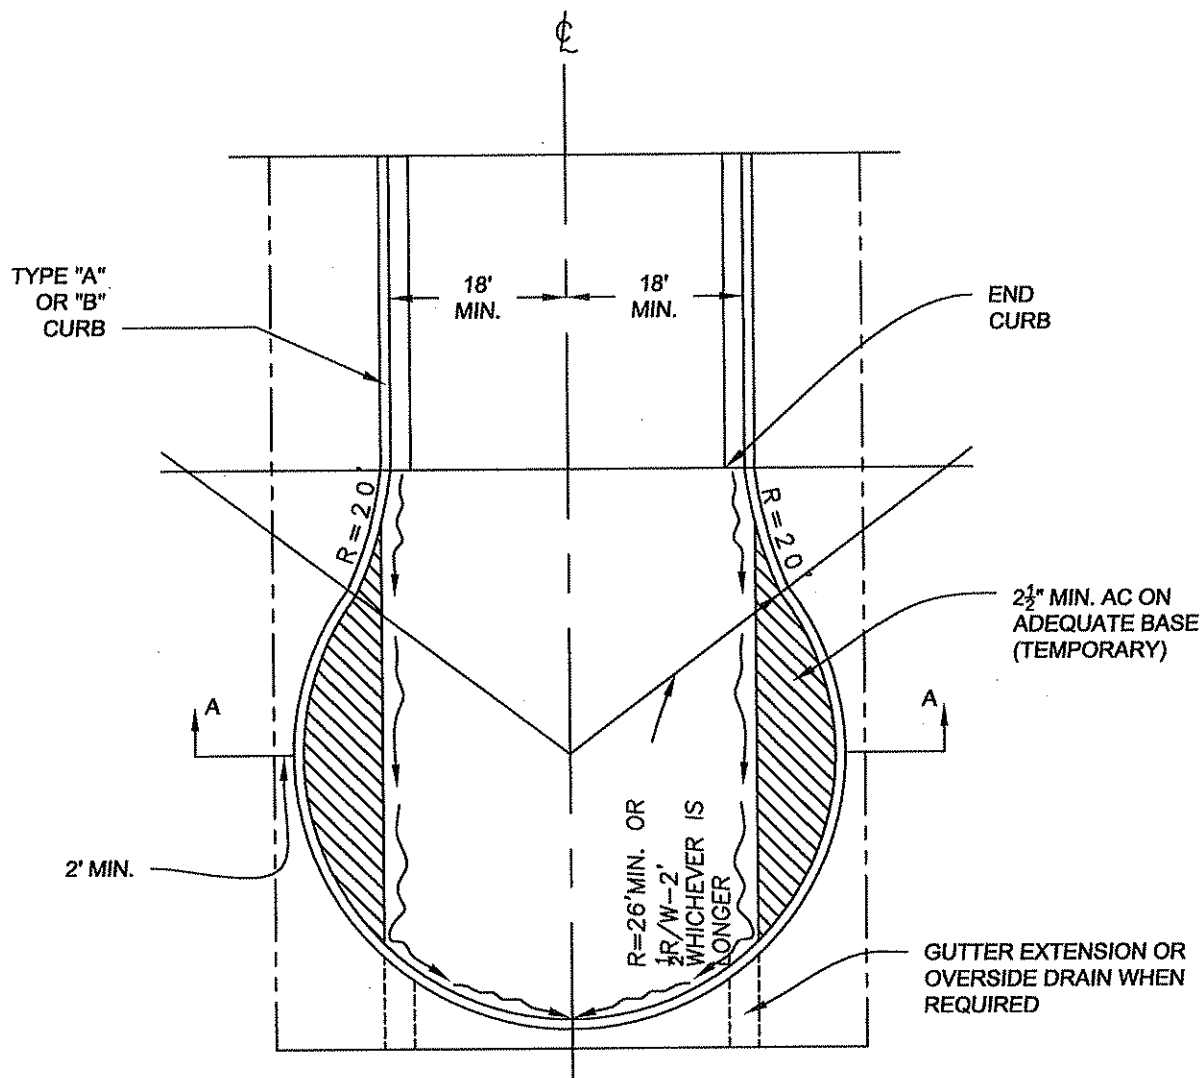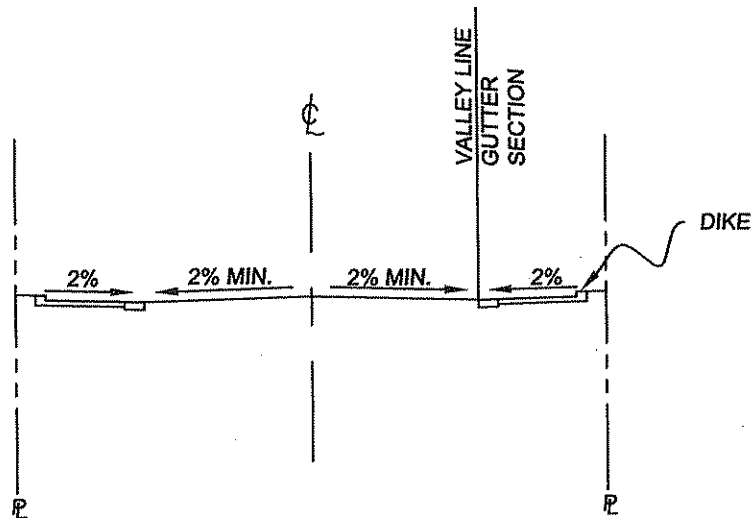


City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
 510 E. FLORIDA AVENUE
 HEMET, CA 92543
 (951) 765-2360

TEMPORARY TURN-AROUND AT DEAD-END STREET


Michael A. Gow
 MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164
 MAR 2009
 DATE
 REVISIONS
 N:\PW\4100\COH_STDS\REVISIONS\MISC-GIG-801.dwg
 N.Beltran 2009

1
 OF 1 SHEETS
STANDARD NO.
G-801

1. DELINEATORS TO BE SINGLE UNIT 3" DIA. RED STIMSONITE IN ALUMINUM MOUNTS, OR 5" SQUARE RED SCOTCHLITE ON ALUMINUM SHEET; OR W61R PLATES; AS DIRECTED BY THE ENGINEER.
2. AT VERY HAZARDOUS LOCATIONS A CODE W-21-R 9-LIGHT CLUSTER SHALL BE FURNISHED AND MOUNTED ON CENTER LINE POST ABOVE THE RAIL NUMBER.
3. RAIL TIMBER TO BE NO. 1 D.F. S4S AND TO RECIEVE TWO (2) COATS OUTSIDE WHITE PAINT - POSTS RED-WOOD S4S.
4. SET POST 2' MIN. IN GROUND.

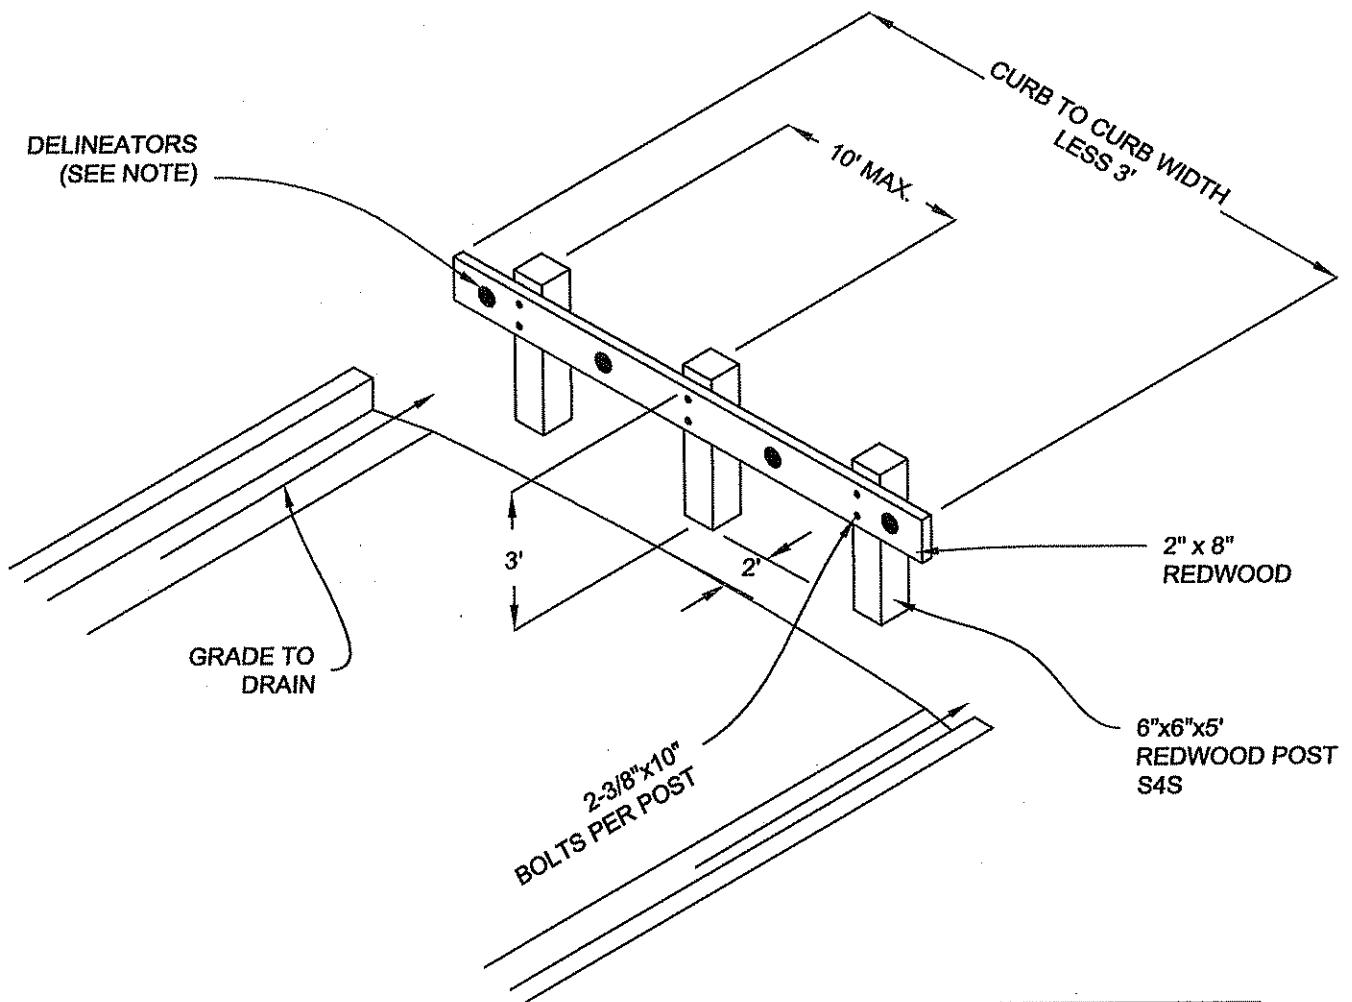

ST. WIDTH	POSTS	DELINEATORS
36'	5	7
40'	5	8
44'	5	9
64'	7	14
72'	9	16



510 E. FLORIDA AVENUE
HEMET, CA 92543
(951) 765-2360

TYPICAL BARRICADE

		BARRICADE	
MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164		MAR 2009 DATE	
REVISIONS			
N:\PW\4100\COH_STDS\REVISIONS\MISC-GIG-802.dwg		N.Beltran 2009	


MAR 2009

DATE _____


1

OF 2 SHEETS

STANDARD NO.
G-802

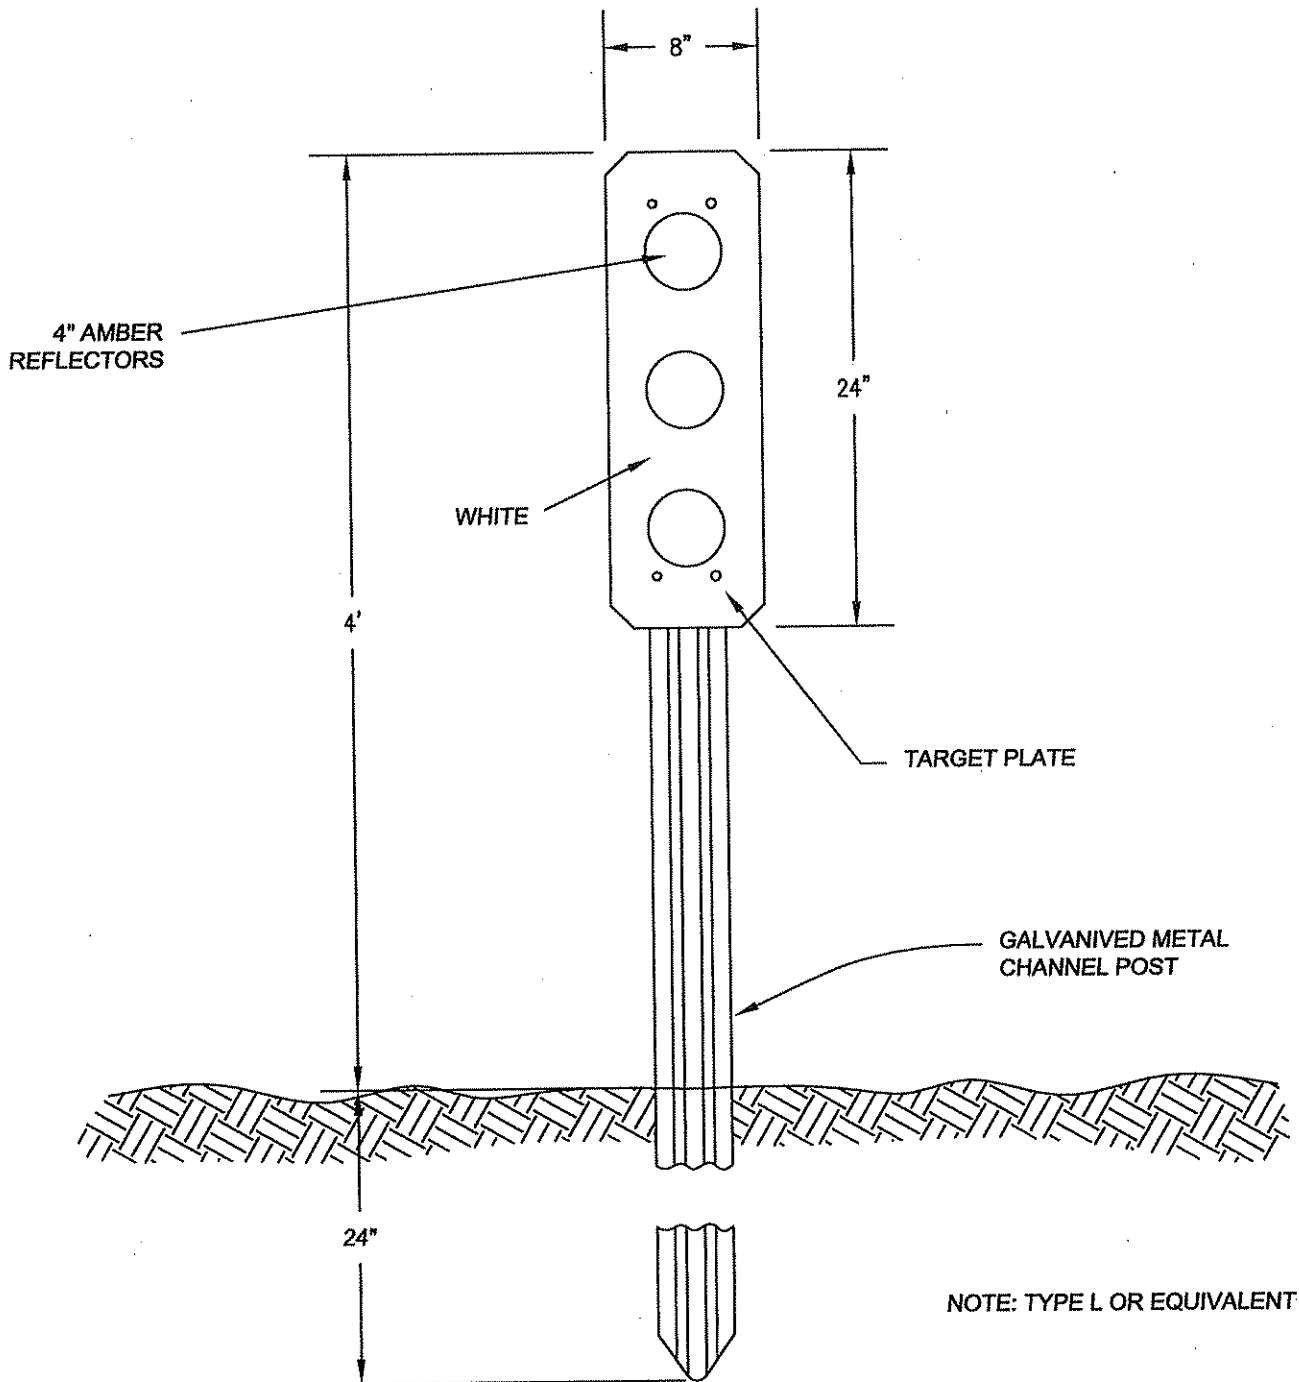

NOTE: TYPE L OR EQUIVALENT



City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
 510 E. FLORIDA AVENUE
 HEMET, CA 92543
 (951) 765-2360

GUIDE MAKER

MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164	MAR 2009
	DATE
REVISIONS	
N:\PW\4100\COH_STDS\REVISIONS\MISC-G\G-802A.dwg	
N.Beltran 2009	

2
 OF 2 SHEETS
STANDARD NO.
G-802A

NO TRESPASSING

VIOLATES PENAL CODE 602


NO DUMPING

VIOLATES CITY CODE SEC 62.5

PENALTY \$1000 FINE OR

SIX MONTHS IN JAIL OR BOTH

PROPERTY CITY OF HEMET

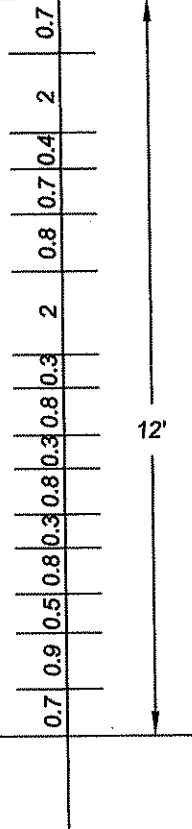


18'

1.5" Radius, 0.3" Border, Red on White;

"NO TRESPASSING" B; "VIOLATES PENAL CODE 602" C; "NO DUMPING" B;

"VIOLATES CITY CODE SEC 62.5" C; "PENALTY \$1000 FINE OR" C;

"SIX MONTHS IN JAIL OR BOTH" C; "PROPERTY CITY OF HEMET" C;



City of Hemet

PUBLIC WORKS DEPARTMENT

ENGINEERING DIVISION

510 E. FLORIDA AVENUE
HEMET, CA 92543
(951) 765-2360


"NO TRESPASSING" SIGN

	
MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164	MAR 2009 DATE
REVISIONS	
N:\PW4100\COH_STDS\REVISIONS\MISC-GIG-803.dwg	
N.Bellran 2009	


1

OF 1 SHEETS

**STANDARD NO.
G-803**

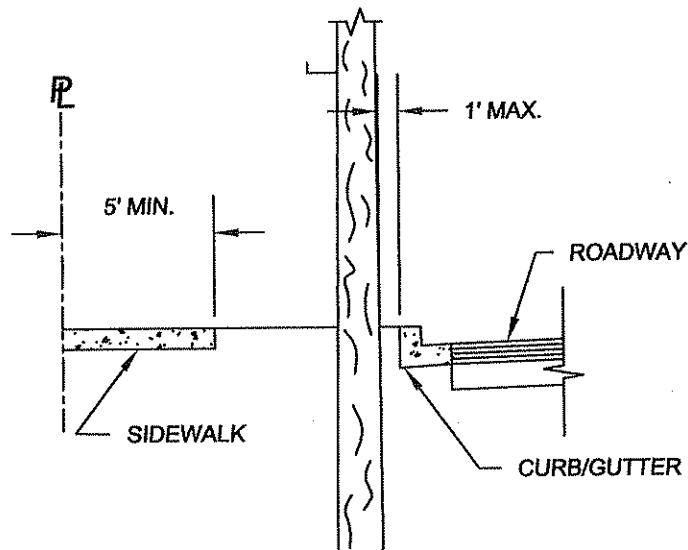

STANDARD SECTION "A"

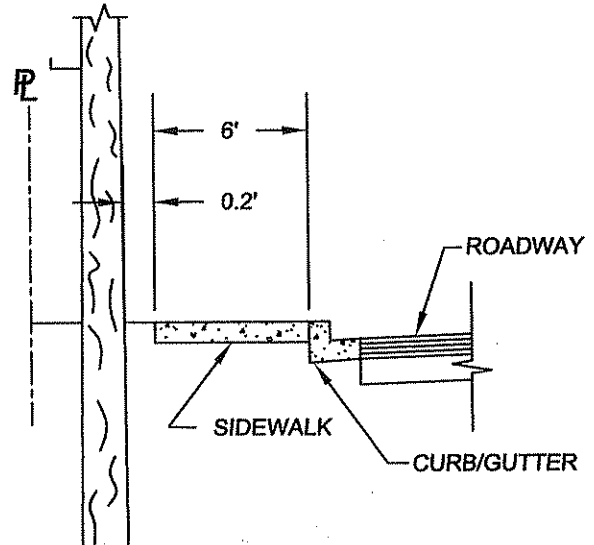


STANDARD SECTION "B"

NOTES:

STANDARD SECTION "A":
WITH PARKWAY AREA BETWEEN SIDEWALK
AND BACK OF CURB.

STANDARD SECTION "B":
WITH CONTIGUOUS SIDEWALK LOCATION WITH
PARKWAY AREA BETWEEN SIDEWALK AND
PROPERTY LINE.

ALTERNATE SECTION:
LOCATION WITH CONTIGUOUS CURB AND SIDEWALK.

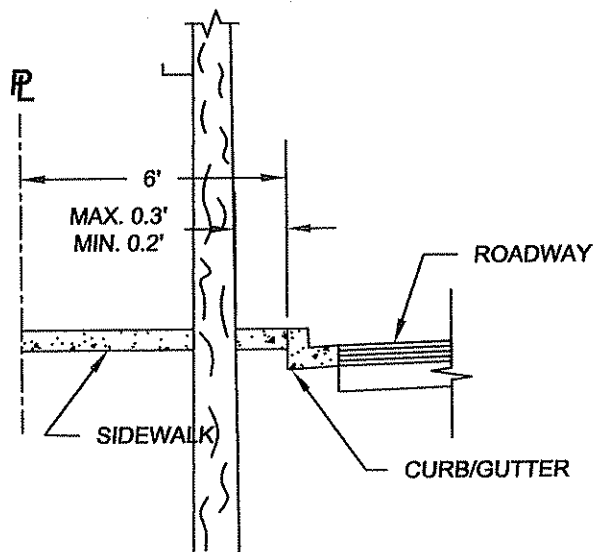

ALTERNATE SECTION


NOTES:

1. IN COMERCIAL AREAS (10' SIDEWALKS) PLACE SHOWN IN ALTERNATE (SEE NOTE 2).
2. DO NOT PLACE POLES AS INDICATED IN ALTERNATE WITHOUT PRIOR APPROVAL OF PUBLIC WORKS DEPT.
3. FOR CONFIRMATION OF CENTERLINE CONTROL CONTACT PUBLIC WORKS DEPT.
4. NO POLES AT INTERSECTION. PROPER SIGHT DISTANCE MUST BE MAINTIANED.




City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
510 E. FLORIDA AVENUE
HEMET, CA 92543
(951) 765-2360

**POWER POLE AND LIGHT STANDARDS,
TYPICAL STREET SECTIONS**


 MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164	MAR 2009 DATE
REVISIONS	
N:\PW\4100\COH_STDS\REVISIONS\MISC-GIG-805.dwg	

1
OF **2** SHEETS
STANDARD NO.
G-805

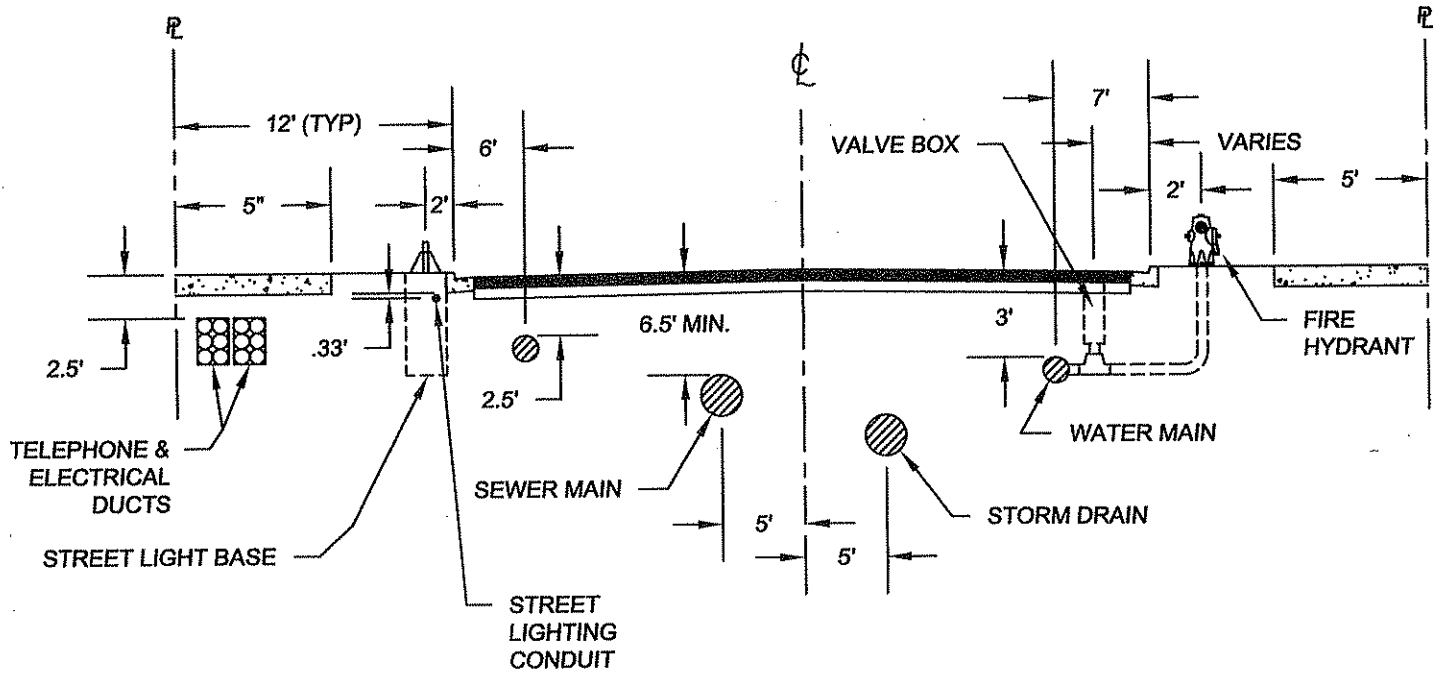

NOTES:

THESE STANDARDS ARE FOR GENERAL GUIDANCE OF UTILITY INSTALLATION AND SHOULD IN NO WAY BE CONSTRUCTED AS REQUIREMENTS.



City of Hemet

PUBLIC WORKS DEPARTMENT

ENGINEERING DIVISION

510 E. FLORIDA AVENUE
HEMET, CA 92543
(951) 765-2360


SUGGESTED NORMAL LOCATION OF UNDERGROUND UTILITIES

MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164		MAR 2009
DATE		
REVISIONS		
N:\PW41100\COH_STDS\REVISIONS\MISC-G-805A.dwg		
N.Beltran 2009		

2

OF 2 SHEETS

**STANDARD NO.
G-805A**

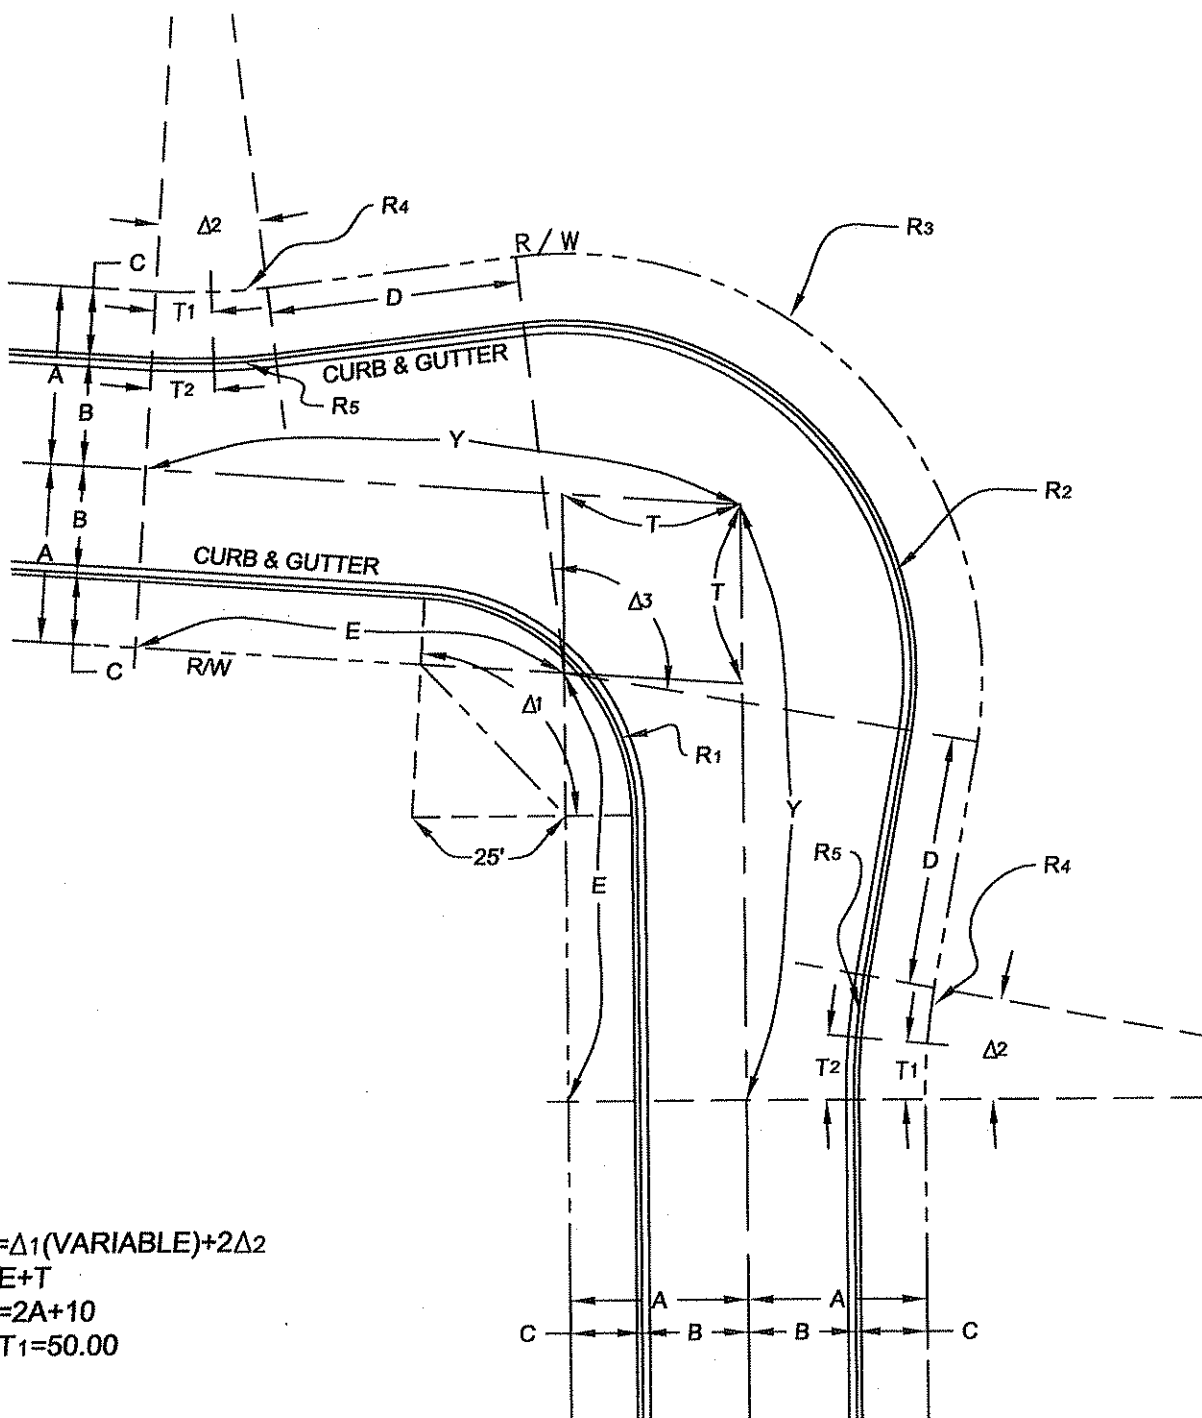

$$\Delta 3 = \Delta 1 (\text{VARIABLE}) + 2\Delta 2$$

$$Y = E + T$$

$$R_3 = 2A + 10$$

$$D + T_1 = 50.00$$

R/W	ROADWAY IMPROVEMENT WIDTH	A	B	C	D	E	R ₁	R ₂	R ₃	D ₂	R ₄	T ₁	R ₅	T ₂
50	32	25	16	9	40.91	69.09	34	51	60	10°23'20"	100	9.09	109	9.91
60	36	30	18	12	41.04	70.60	37	58	70	10°14'11"	100	8.96	112	10.03
60	40	30	20	10	41.04	70.60	35	60	70	10°14'11"	100	8.96	110	9.85
66	44	33	22	11	41.12	71.49	36	65	76	10°08'57"	100	8.88	111	9.86



City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
 610 E. FLORIDA AVENUE
 HEMET, CA 92543
 (951) 765-2360

STANDARD KNUCKLE CUL-DE-SAC

Michael A. Gow
 MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164

MAR 2009

DATE

REVISIONS

F.N. N:\PW4100\COH_STDS\REVISIONS\MISC-GIG-806.dwg

N.Beltran 2009

1

OF 1 SHEETS

STANDARD NO.
G-806

23.5'

APPROVED BY:

JOHN DOE, CITY OF HEMET

RCE NO. - EXP. DATE

DATE:



City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
510 E. FLORIDA AVE.
HEMET, CA 92543
(951) 765-2360

City of Hemet

CASE NUMBER &
JOB TITLE

W.O. F.N.

OF SHEETS

FILE NO.

2"

ENGINEER'S
STAMP

ENGINEER'S
LOGO

PREPARED UNDER THE SUPERVISION OF:

DATE: SCALE: BENCHMARK:

DATE: DATE:

AN AUTOCAD FILE OF THIS TITLE BLOCK CAN BE OBTAINED FROM THE CITY'S WEBSITE: WWW.CITYOFHEMET.ORG



City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
510 E. FLORIDA AVENUE
HEMET, CA 92543
(951) 765-2360

**STANDARD CITY
TITLE BLOCK**

[Signature]

MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164

MAR 2009

DATE

REVISIONS

NO.	DATE	BY	APPROVED

NA PW4100\COH_STDS\REVISIONS\MISC-G\G-807.dwg

N.Beltran 2009

1

OF 1 SHEETS

STANDARD NO.

G-807

6"

24" MIN.

12"

3/4" CRUSHED ROCK

3" MIN.

1-1/4" CONDUIT


1" CONDUIT TO LUMINAIRE

1-1/4" CONDUIT

**DO NOT PLACE IN DRIVEWAY, SIDEWALK,
DRAINAGE SWALE OR ROADWAY, 3' MIN.
FROM FIRE HYDRANT. SPACE EQUAL ON
RUNS NOT TO EXCEED 200'**




1. SERVICE PEDESTAL SHALL BE MYERS ELECTRIC PRODUCTS MEUGL-M100/TB OR APPROVED EQUAL.
2. CIRCUIT BREAKERS SHALL BE SUITABLE FOR USE ON 120-240 VOLT SERVICE AND SHALL BE APPROVED BY UNDERWRITERS LABORATORY.
3. CABINET SHALL BE BONDED TO CONDUIT WITH COPPER GROUND WIRE EQUIVALENT TO NO. 6 A.W.G.
4. PULL BOX SHALL BE INSTALLED NEXT TO BASE WITH 1 1/2" CONDUIT MIN.
5. CONDUITS SHALL EXTEND INTO CABINET 1" ABOVE FLOOR AND HAVE APPROVED CONDUIT BUSHING.
6. CONTRACTOR SHALL MAKE ARRANGEMENTS WITH UTILITY FOR 120-240 VOLT SERVICE AND SHALL BE RESPONSIBLE FOR ANY CHARGES BY THE UTILITY FOR ANY WORK.
7. PULLBOXES TOP TO BE FLUSH WITH ADJACENT GRADE.
8. A SEPARATE PERMIT AND INSPECTION FROM THE BUILDING DEPARTMENT IS REQUIRED FOR PEDESTAL.




City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
510 E. FLORIDA AVENUE
HEMET, CA 92543
(961) 765-2360

MAR 2011
 JORGE L. BIAGIONI, PRINCIPAL ENGINEER R.C.E. 33751 DATE
 REVISIONS
 A MARCH 2011 ADDED DIMENSION
 N:\PWA4100\COH STDS\REVISIONS\MISC-GIG-808A.dwg N.Beltran 2011

2
OF 3 SHEETS
STANDARD NO.
G-808A

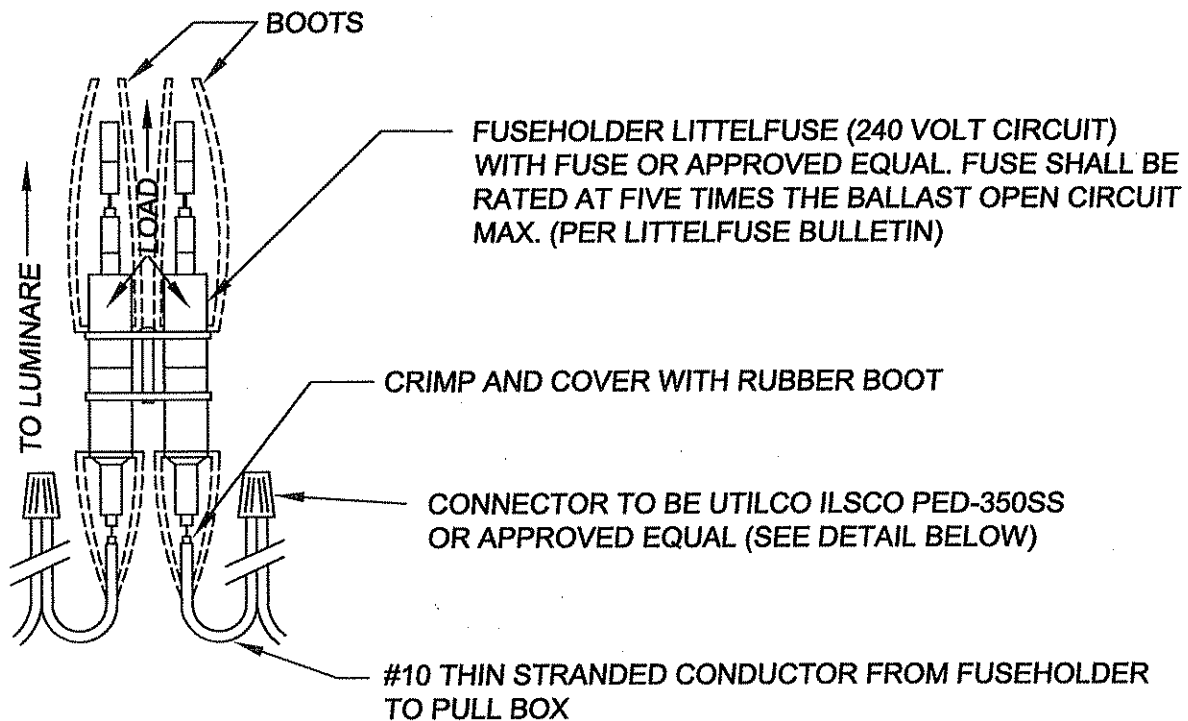

FUSEHOLDER DETAIL

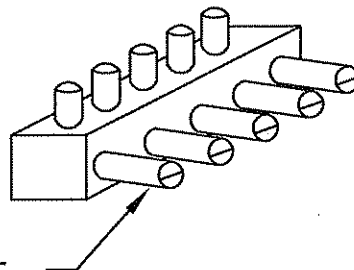


WIRE CONES TO BE FILLED WITH SILICONE.

CONNECTOR DETAIL

NOTES:

1. FUSEHOLDER TO BE PLACED IN THE HANDHOLE OF STREETLIGHT POLE.
2. FUSEHOLDER TO BE ON THE "LOAD SIDE".
3. FUSEHOLDER SHALL BE INSTALLED WITH LITTEL FUSE BOOTS.
4. CONNECTORS SHALL HAVE 5 PORTS.
5. A CONNECTOR WITH MINIMUM 2 EXTRA PORTS SHALL BE INSTALLED, IN THE PULL BOX, FOR FUTURE USE.
6. CONNECTORS TO BE INSTALLED PER MANUFACTURER'S SPECIFICATIONS.




City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
 510 E. FLORIDA AVENUE
 HEMET, CA 92543
 (951) 765-2380

FUSEHOLDER DETAILS

Michael A. Gow
 MAR 2009
 MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164 DATE
 REVISIONS
 N:\PW4100\COH_STDS\REVISIONS\MISC-GYG-808B.dwg N.Beltran 2009

3
 OF 3 SHEETS
STANDARD NO.
G-808B



City of Hemet

PUBLIC WORKS DEPARTMENT

ENGINEERING DIVISION

510 E. FLORIDA AVENUE
HEMET, CA 92543
(951) 765-2360

ADVANCE STREET NAME SIGN DETAIL

MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164

MAR 2009

DATE

REVISIONS

N:\PW4100\COH_STDS\REVISIONS\MISC-G\G-809.dwg

N.Beltran 2009

1

OF 1 SHEETS

STANDARD NO.
G-809

MATERIALS

- 1 - SIGN BLANK SHALL BE .125 GAUGE FLAT ALUMINUM.
- 2 - BACK OF PANEL SHALL BE REINFORCED WITH 2 - 1 1/2"x1 1/4" ALUMINUM CHANNEL 12" O.C. RIVETED THROUGH SIGN FACE.
- 3 - ALL COMPONENTS OF THE SIGN FACE SHALL BE ENCAPSULATED LENS SHEETING.

COLOR

- 1 - BACKGROUND SHALL BE BLUE FOR LETTERS, SILVER FOR LOGO.
- 2 - ALL LEGENDS, ABBREVIATIONS, NUMBERS AND BORDER SHALL BE SILVER.
- 3 - CITY LOGO SHALL BE BLUE.


LEGEND

- 1 - STREET NAME SHALL BE 6" UPPER CASE AND 4 1/2" LOWER CASE, SERIES C.
- 2 - LOGO SHALL BE 8 5/8" x 8 1/4".

FABRICATION

- 1 - BACKGROUND, BORDER, LETTERS, NUMERALS, AND LOGO SHALL BE SILK SCREENED OR TRANSPARENT ELECTRONIC CUTTING FILM OVERLAY MAY BE USED.

* WHERE STREET NAME CONTAINS LETTERS WITH DESCENDERS (ie., g, j, p, q, y), THE UPPER MARGIN SHALL BE REDUCED TO 5 1/4" AND THE LOWER MARGIN INCREASED TO 6 3/4".

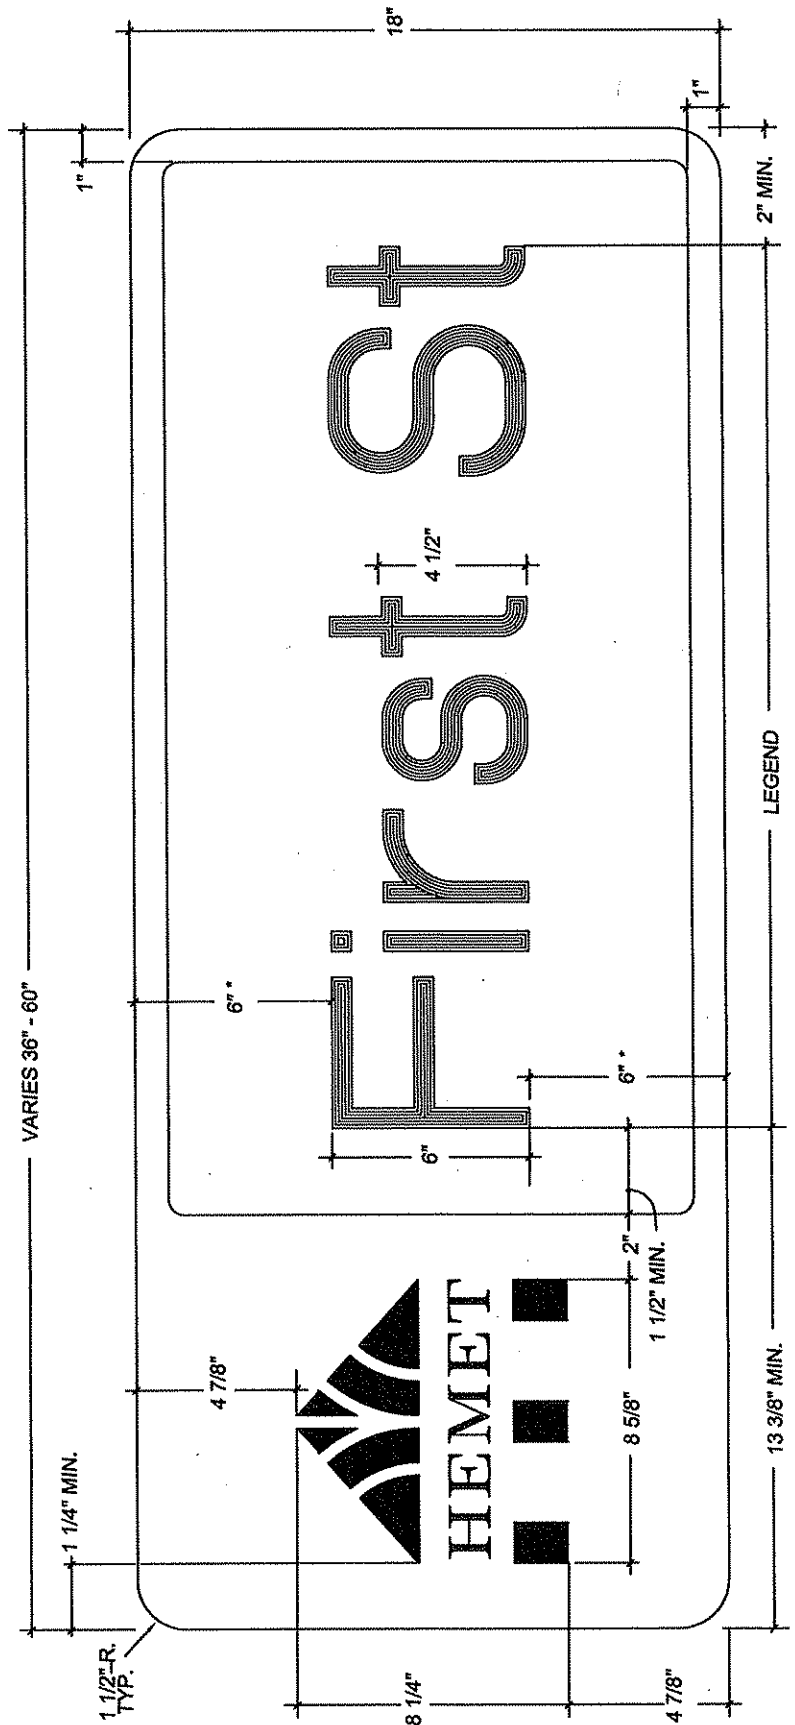

510 E. FLORIDA AVENUE
HEMET, CA 92543
(951) 765-2360

31

M. A. A.

MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164

DATE _____

REVISIONS

N:\PW\4100\COH STDS\REVISIONS\MISC-GIG-810.dwg


N.Beltran 2009

OF 4 SHEETS

STANDARD NO.
G-810


Technical drawing of a rectangular sign with the following specifications:

- Overall Dimensions:** 32" x 48" (VARIES 32" - 48").
- Top Section:**
 - Height: 1 1/4" MIN.
 - Text: "HEMET" (upside down).
 - Graphic: A stylized graphic consisting of a triangle and a square.
 - Dimensions: 1 7/8" (triangle height), 1 7/8" (square height), 5 1/4" (total width).
- Middle Section:**
 - Text: "First" (large, outlined letters).
 - Dimensions: 3 3/4" (height of "t"), 6" (width of "F"), 2" (width of "r").
- Bottom Section:**
 - Text: "100N Dr" (large, outlined letters).
 - Dimensions: 1 1/2" (width of "1"), 2 1/8" (width of "00"), 1 1/8" (width of "N"), 2 3/4" (width of "Dr"), 1 1/4" (width of "Dr").
- Right Side Dimensions:**
 - 1" MIN. (width of "First")
 - 2 3/4" (width of "100N Dr")
 - 1 1/4" (width of "HEMET")
 - 5 1/2" (width of "HEMET" and "HEMET" graphic)
 - 11" (total width)

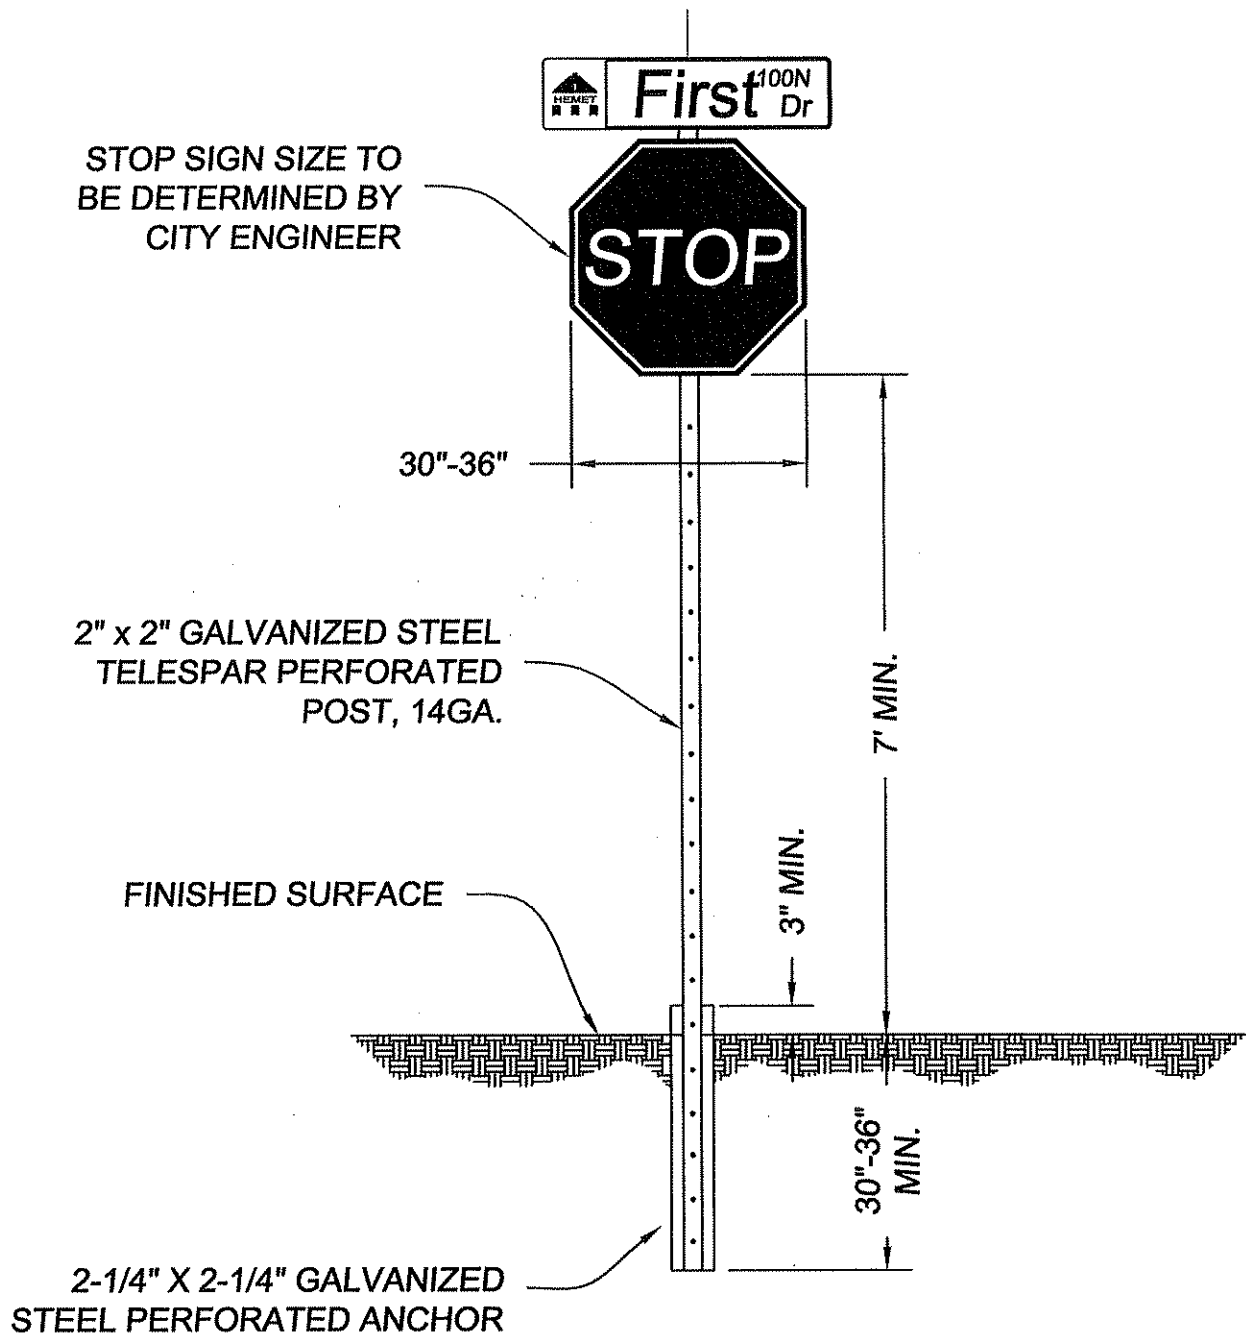

NOTES:

1. SIGN LOCATION TO BE DETERMINED BY CITY ENGINEER
2. POST SHALL BE ATTACHED TO ANCHOR WITH 3/8" JUMBO HEAD DRIVE RIVET
3. SIGN - .080" ALUMINUM
4. AVERY HIGH INTENSITY OR APPROVED EQUAL
- △ 5. STREET NAME SIGNS SHALL BE MOUNTED ON 812 SERIES BRACKET, BY SAFEWAY SIGN COMPANY OR APPROVED EQUAL.



City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION


510 E. FLORIDA AVENUE
HEMET, CA 92543
(951) 765-2360

STOP SIGN

		MAR 2011
JORGE L. BIAGIONI, PRINCIPAL ENGINEER R.C.E. 33751		DATE
REVISIONS		
Δ MARCH 2011	ADDED NOTE 5.	
N:\PW\4100\COH_STDS\REVISIONS\MISC-GIG-810A.dwg		N.Beltran 2011

2
OF 4 SHEETS

STANDARD NO.
G-810A

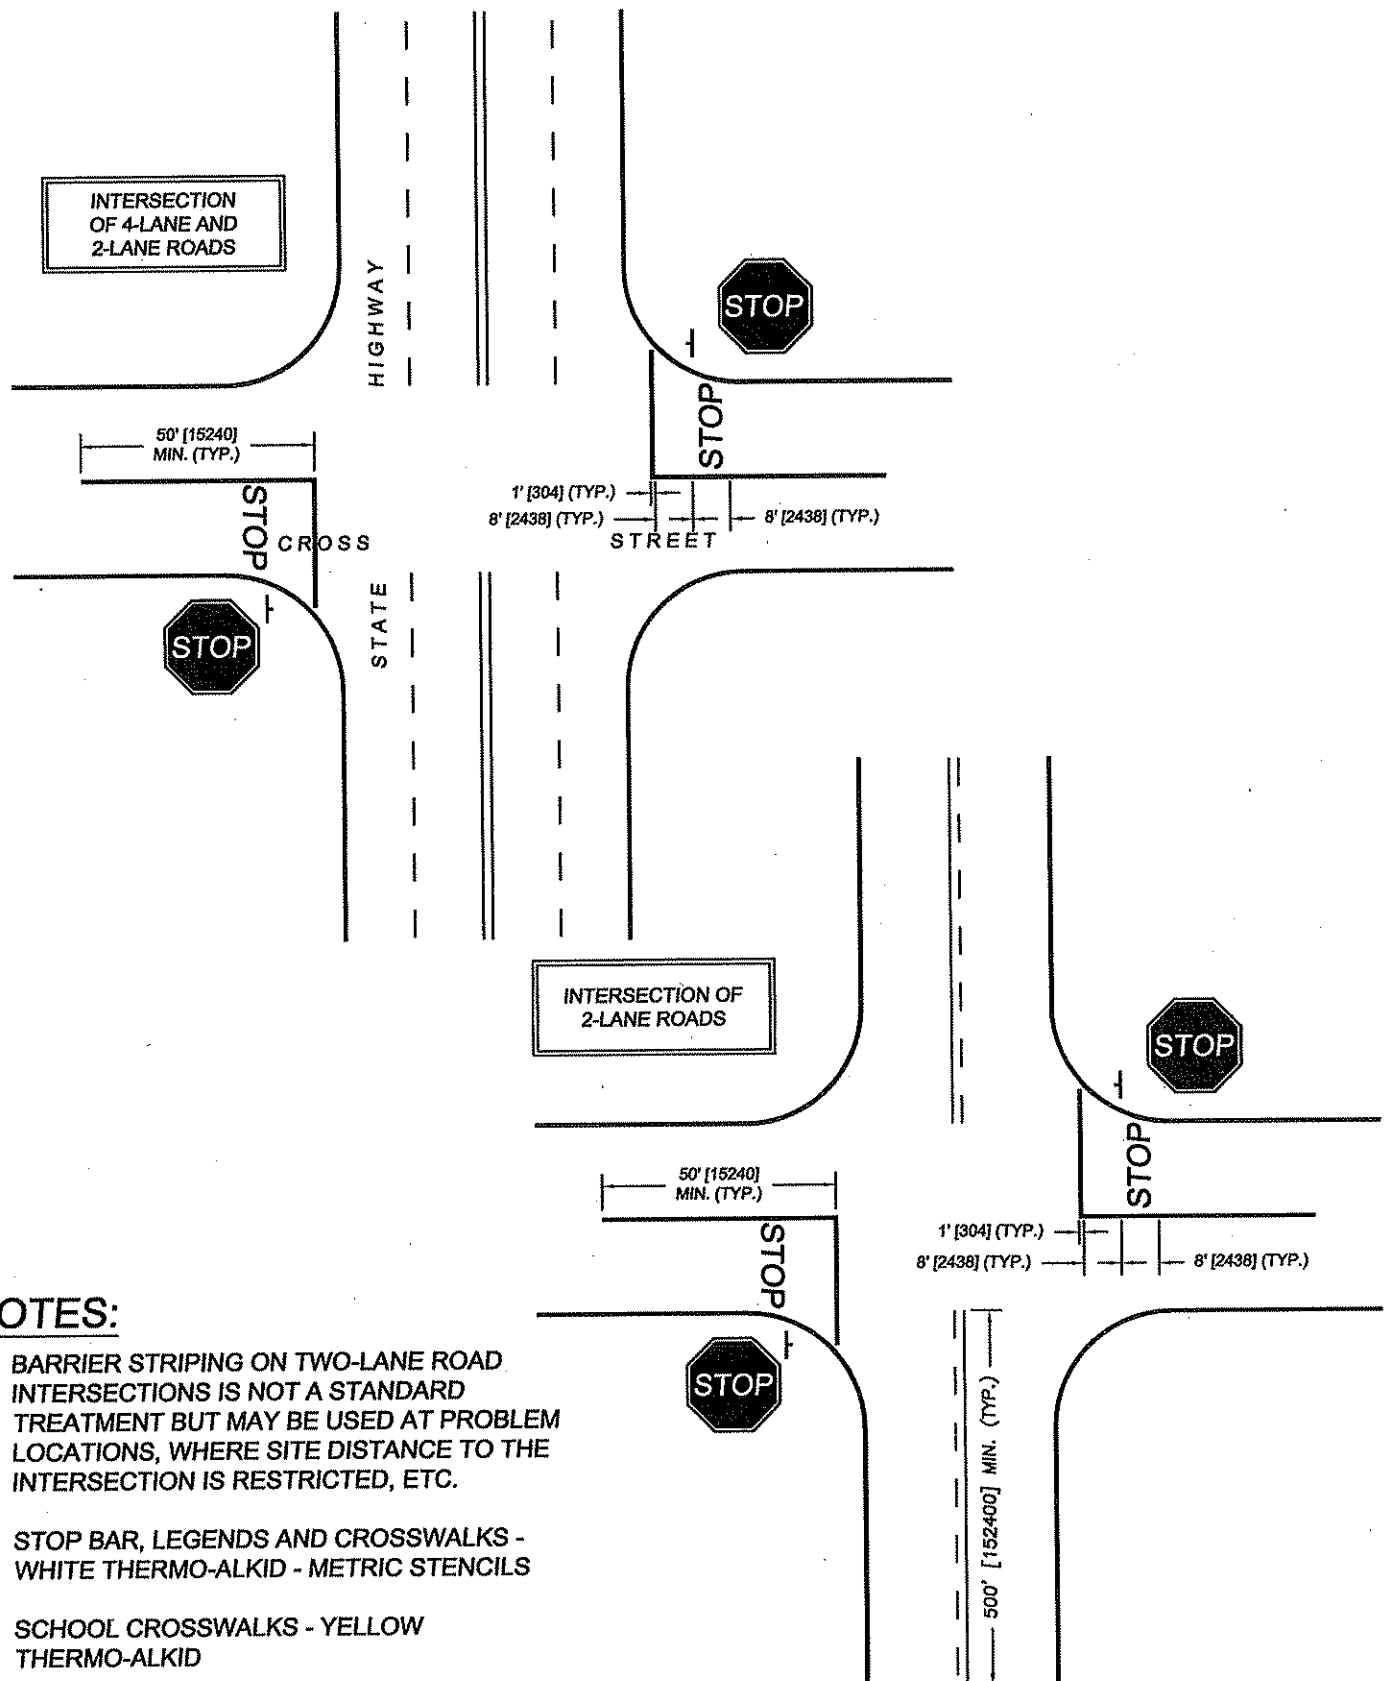

NOTES:

1. BARRIER STRIPING ON TWO-LANE ROAD INTERSECTIONS IS NOT A STANDARD TREATMENT BUT MAY BE USED AT PROBLEM LOCATIONS, WHERE SITE DISTANCE TO THE INTERSECTION IS RESTRICTED, ETC.

2. STOP BAR, LEGENDS AND CROSSWALKS - WHITE THERMO-ALKID - METRIC STENCILS

3. SCHOOL CROSSWALKS - YELLOW THERMO-ALKID



City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
 510 E. FLORIDA AVENUE
 HEMET, CA 92543
 (951) 765-2360




SIGN AND STRIPING PLAN

		MAR 2009
MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164		DATE
REVISIONS		
N:\PW4100\COH_STDS\REVISIONS\MISC-GIG-810B.dwg		
N.Beltran 2009		

3
 OF 4 SHEETS
STANDARD NO.
G-810B

NOTES:


1. CORNER FOR INSTALLATION SHALL BE AS DESIGNATED BY THE CITY ENGINEER
2. SAWCUT REQUIRED IF SIGN INSTALLED AFTER SIDEWALK POURED
3. WHEN POURED IN SIDEWALK, POLES WILL BE SET PRIOR TO SIDEWALK POUR
4. UTILIZE SAME POST FOR STOP SIGN AND STREET NAME SIGN WHERE POSSIBLE

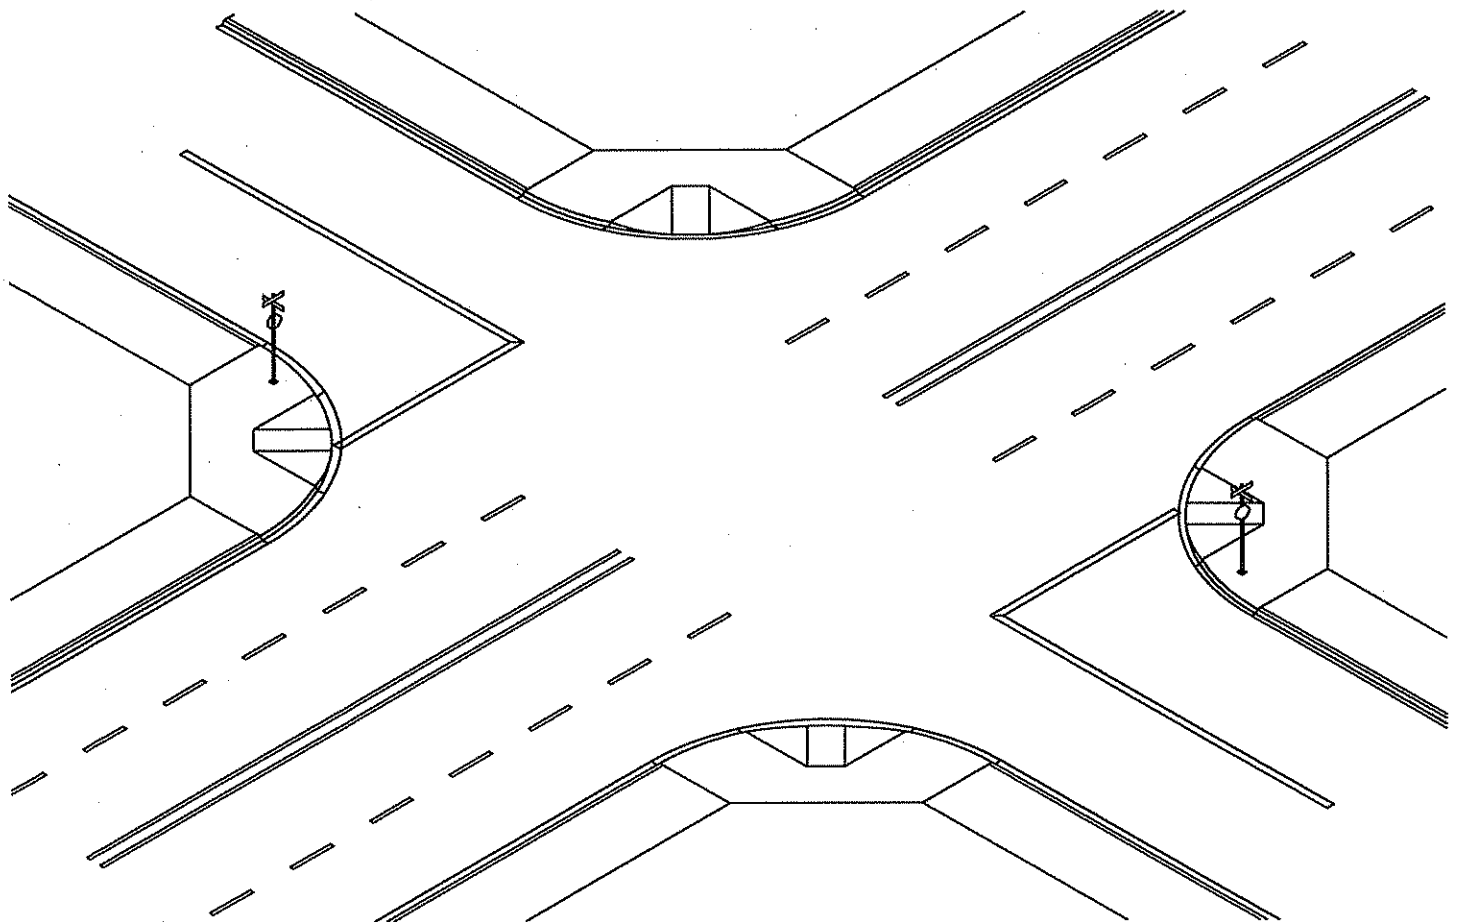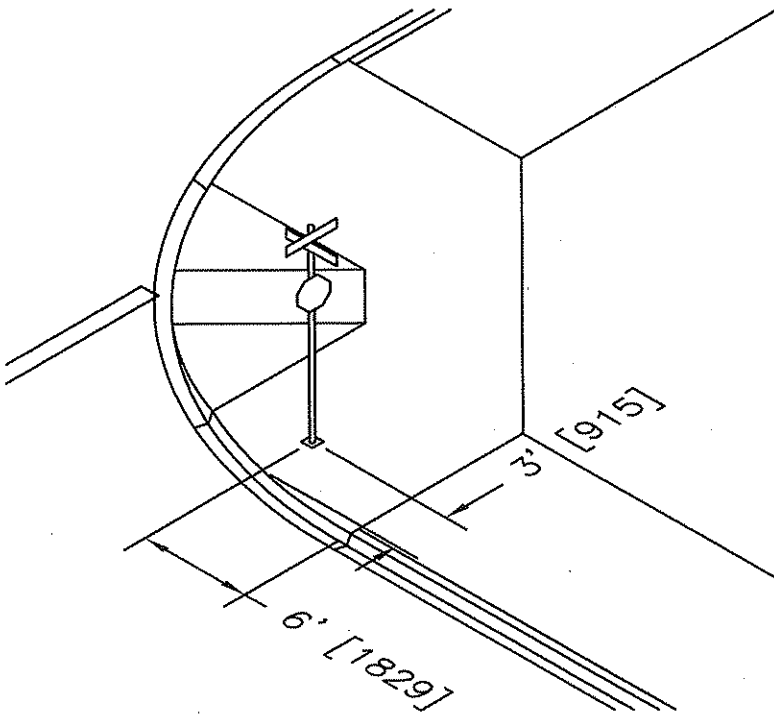


City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

510 E. FLORIDA AVENUE
 HEMET, CA 92543
 (951) 765-2360


STREET SIGN LOCATION PLAN

 MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164		MAR 2009 DATE
REVISIONS		
N:\PW\4100\COH_STDS\REVISIONS\MISC-GVG-810C.dwg		
N.Beltran 2009		


4
 OF 4 SHEETS
STANDARD NO.
G-810C

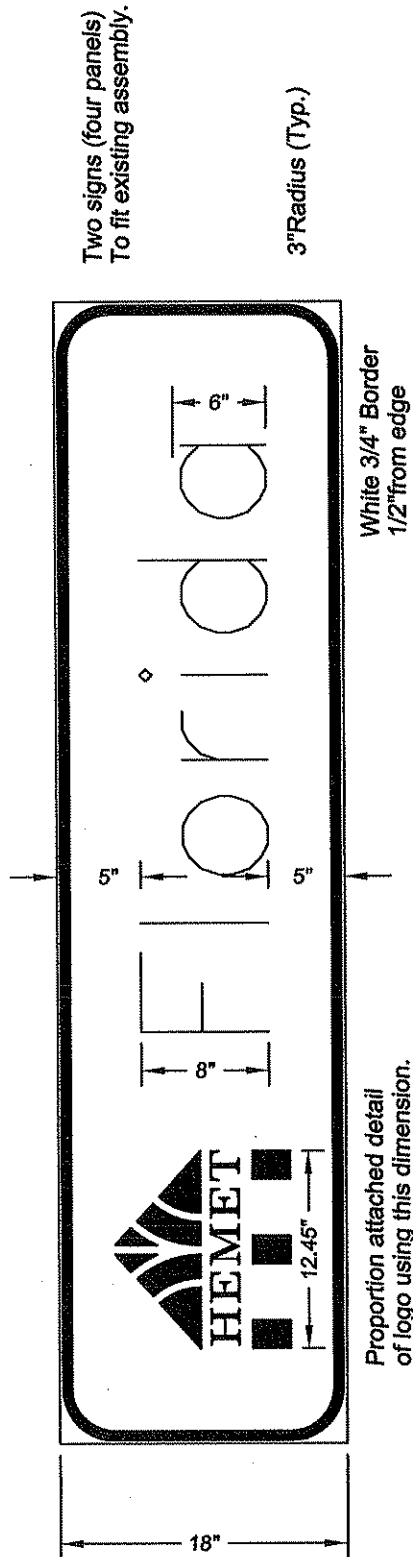

One sign (two panels) 100N
One sign (two panels) 100S

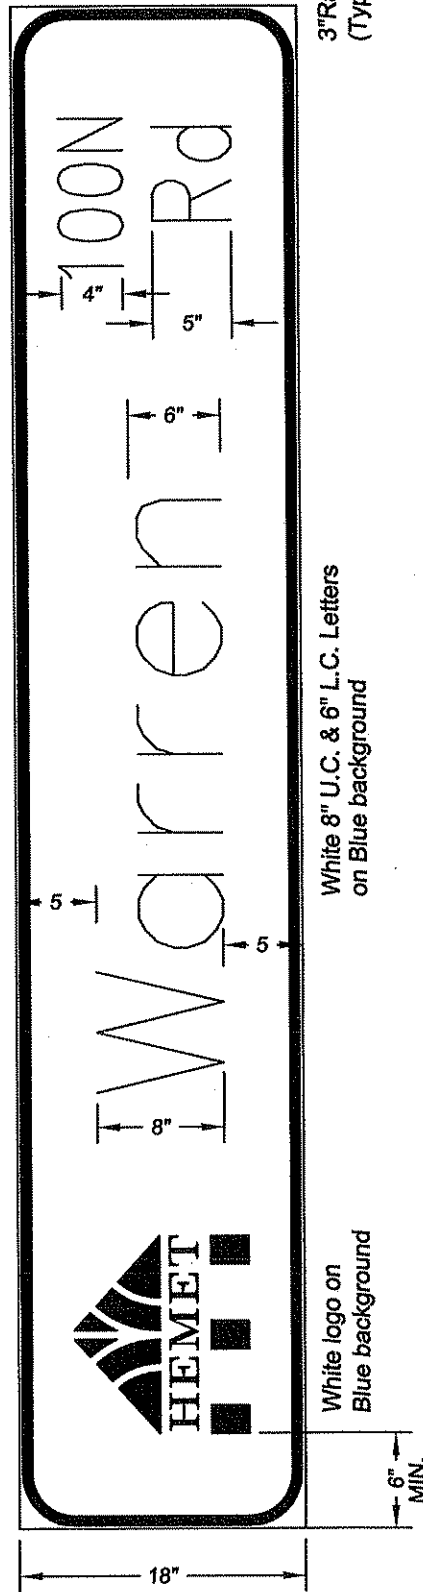

NOTE: IT IS THE RESPONSIBILITY OF THE
CONTRACTOR TO MAKE SURE THAT THE
STREET NAME SIGN FITS THE BOX.




City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
510 E. FLORIDA AVENUE
HEMET, CA 92543
(951) 766-2360

STREET NAME SIGN FOR TRAFFIC SIGNALS

Michael A. Gow
MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164
MAR 2009
DATE
REVISIONS
N:\PWW\100\COH_STDS\REVISIONS\MISC-G\G-811.dwg
N.Beltran 2009

1
OF 1 SHEETS
STANDARD NO.
G-811

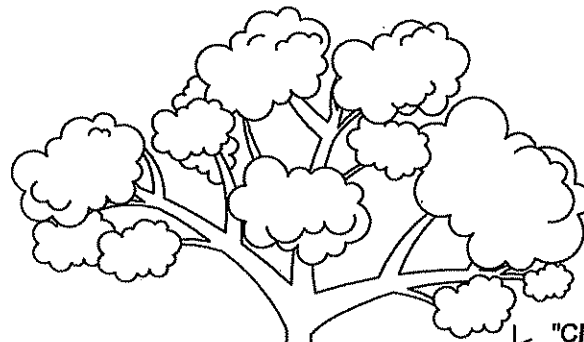

NOTE:
WHEN SIDEWALK IS ADJACENT TO
THE CURB, STREET TREE SHALL BE
NO GREATER THAN 6 FEET (1.8m)
FROM THE BACK OF SIDEWALK

"CINCH TIE" OR RUBBER HOSE CASING
OR EQUAL WITH DOUBLE STRAND 12
GAUGE GALVANIZED WIRE

2x2 REDWOOD STAKES OR EQUAL - 8'
(2.4m) LONG, AVOID ROOTBALL

APPROVED STREET TREE SHALL BE A
MIN. OF 1.5 INCH (38.1mm) CALIPER
MEASURED 4 FEET (1.2m) ABOVE
FINISHED GRADE

GRASS PARKWAY IN RESIDENTIAL AREA
AND TREE WELL IN COMMERCIAL AREA


SIDEWALK

4 AGRIFORM BLUE CHIP
TABLETS OR APPROVED EQUAL
ADD 2 GAL. VITAMIN B-1
COMPOUND (1 TBSP/GAL)
IN TOP 1/2 BACKFILL


DEEP ROOT CONTROL BARRIER-
"DEEP ROOT" OR APPROVED
EQUAL

BACKFILL - 80% NATIVE SOIL,
20% ORGANIC MATERIAL
ADD 2 CUPS BONEMEAL AND 2
CUPS BLOODMEAL TO BACKFILL

LOWER HALF BACKFILL - WATER
TO SETTLE AND TAMP TO 24"
(0.6m) BELOW SIDEWALK GRADE

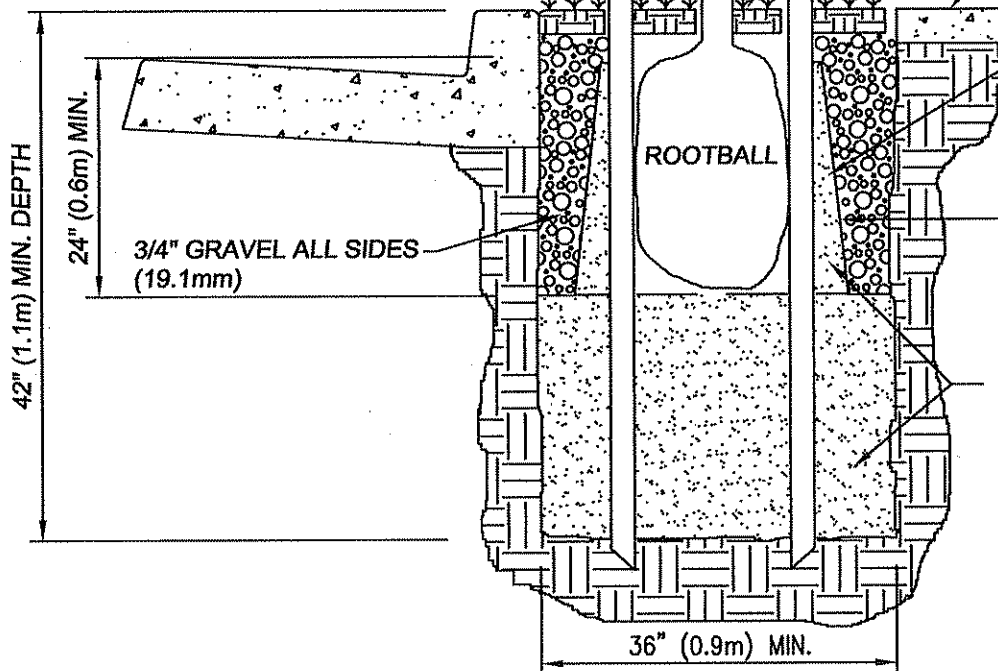

* NOTE: ANY TREE PLANTED WITHIN SIX FEET (1.8m) OF ANY SIDEWALK, DRIVEWAY, CURB
OR GUTTER MUST BE PROVIDED WITH A 24" (0.6m) MIN. ROOT CONTROL BARRIER.





City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
610 E. FLORIDA AVENUE
HEMET, CA 92543
(951) 765-2360

STREET TREE PLANTING

MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164	MAR 2009
	DATE
REVISIONS	
N:\PW4100\COH_STDS\REVISIONS\MISC-GIG-812.dwg	
N.Beltran 2009	

1
OF **1** SHEETS
STANDARD NO.
G-812

RESIDENTIAL LOT

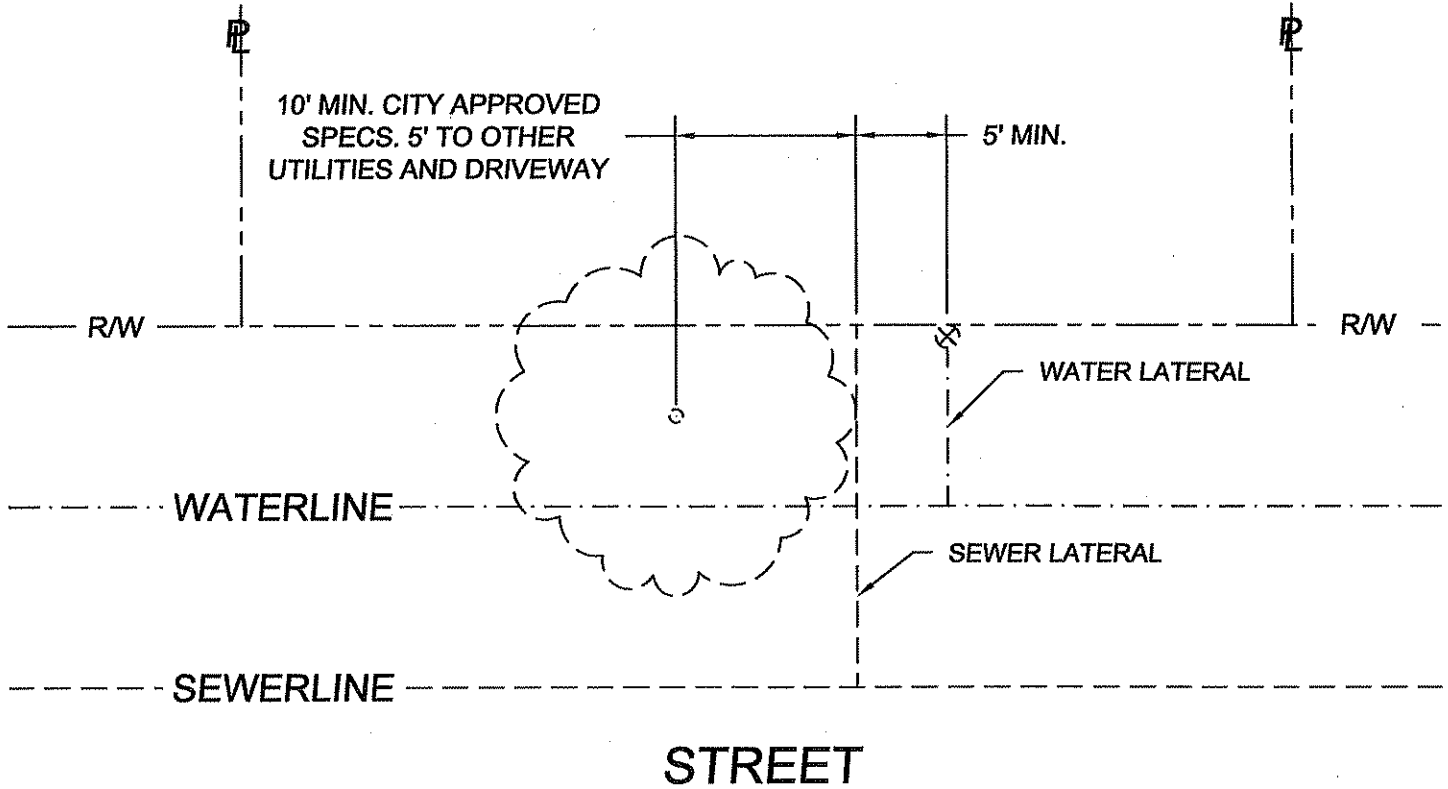

City of Hemet
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION
 510 E. FLORIDA AVENUE
 HEMET, CA 92543
 (951) 765-2360

STREET TREE LOCATION

Michael A. Gow
 MICHAEL A. GOW, PW DIRECTOR/CITY ENG. R.C.E. 54164
 MAR 2009
 DATE
 REVISIONS
 N:\PW4100\COH_STDS\REVISIONS\MISC-GIG-813.dwg
 N.Beltran 2009

1
 OF 1 SHEETS
STANDARD NO.
G-813